




-power in control



## TECHNICAL DOCUMENTATION

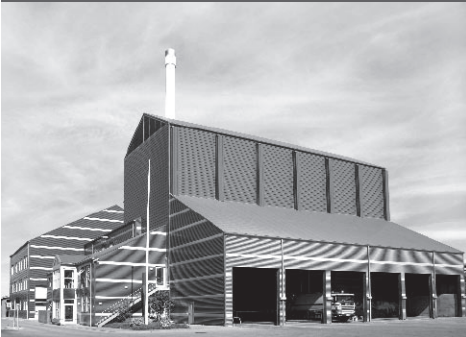

## Technical info for DEIF Current Transformers



DEIF A/S · Frisenborgvej 33 · DK-7800 Skive  
Tel.: +45 9614 9614 · Fax: +45 9614 9615  
info@deif.com · www.deif.com

Document no.: 4921210119D  
SW version:

**1. Contents**

1.1. Technical characteristics.....3  
1.2. Configuration of DEIF low voltage current transformers.....5  
1.3. Markings of the current transformers connection terminals.....8  
1.4. Error curves of low voltage current transformers.....8  
1.5. Power requirements of measuring units and relays.....9

# 1. Contents

## 1.1 Technical characteristics

Current transformers are special transformers for the proportional transformation of high currents into directly measurable values. Their construction and physical operating principle enables a galvanic separation of the - primary circuit from the measured circuit, thereby providing a protection for sequentially connected instruments in the event of a fault.

<b>Rated limit current</b> [I <sub>PL</sub> ]	Value of the lowest primary current where, by the secondary measuring burden, the total deviation of the current transformer for measuring purposes is equal to or greater than 10 %.
<b>Rated current intensity</b> [I <sub>N</sub> ]	Is the noted specified value of the primary and secondary current on the rating plate. Standardised primary nominal currents have the following values: 5 A, 10 A, 15 A, 20 A, 25 A, 30 A, 40 A, 50 A, 60 A, 75 A, 100 A with a decadic multiple of the previously mentioned value to a max. of 7500 A. Standardised secondary nominal currents have the values 5 A and 1 A.
<b>Rated power</b>	The value of the apparent power (in a VA-specified power factor), which the current transformer is intended to supply to the secondary circuit and rated burden at the rated secondary current.
<b>Earthing of secondary terminals</b>	According to VDE 0141, section 5.3.4., current- and voltage transformers have to be earthed, starting from U <sub>m</sub> = 3.6 kV. With low voltage (up to U <sub>m</sub> = 1.2 kV) no earthing is required, as long as the transformer housings have no visible exposed metal surfaces.
<b>Phase displacement error</b> [δ]	Signifies the phase shift of the primary current and the secondary current. The direction of the indicator is arranged in such a way, that with an optimum produced current transformer the phase displacement error is equal to zero (IEV 321-01-23 modified). The phase displacement error is to be regarded as positive when the indicator of the secondary current is ahead compared to the indicator of the primary current. The phase displacement error is specified in minutes or hundredths of a radiant. Note: Strictly speaking this definition is only valid for sinus type currents.
<b>Accuracy class</b>	The denotation for a current transformer whose measuring deviation remains below the prescribed operating condition.
<b>Total measuring deviation (current error)</b>	Is the effective value in stationary position, and the difference between: <ol style="list-style-type: none"><li>1. the momentary value of the primary current and</li><li>2. the momentary value of the measuring transmission of the multiplied actual secondary current, whereby the positive indicators of the primary and secondary current correspond to the accord for the connection denotation. The total deviation F1 is generally rendered in the percentages of the effective value of the primary current, as per the following mathematical equation.</li></ol>

$F_I$  = total measuring deviation in %

$i_P$  = momentary value of the primary current

$K_N$  = rated measuring transmission

$i_S$  = momentary value of the secondary current

$I_P$  = effective value of the primary current

$T$  = duration of period

$$F_I = \frac{100}{I_P} \sqrt{\frac{1}{T} \int_0^T (K_N i_S - i_P)^2 dt}$$

**Max. voltage for electrical equipment  $U_m$**

This denotes the highest constant permitted value for phase to phase voltage for which the current transformers isolation is rated.

**Burden**

The impedance of the secondary current is declared in ohms and power factor. The burden is usually expressed as the apparent power in volt-amperes, absorbed at a specified power factor and at the rated secondary current.

**Rated burden**

The value of the burden upon which the accurate requirements of this specifications are based.

**Rated surge current  
[  $I_{DYN}$  ]**

Peak value of the primary current, whose electro-mechanical impact is resisted by the current transformer with short-circuited secondary winding. The value of the nominal search current  $I_{DYN}$  has to be  $2.5 \times I_{TH}$ . Only when there is a deviation from this value, the rating plate has to state  $I_{DYN}$ .

**Actual transformation ratio**

Is the ratio of the primary nominal current to the secondary current. It is specified as an unabridged break on the rating plate.

**Open circuit voltage of current transformers**

Current transformers, which are not directly encumbered with a burden, are generally secondarily short-circuited. A secondary open current transformer operates like a loaded one with an almost infinitely high burden. The curve shape of the secondary current is extremely deformed and under certain conditions voltage surges occur which can be harmful to human beings. The amount of the induced "loss motion" depends on the core cross section and the number of secondary turns. For DEIF current transformers of lower ratings and with a nominal transmission ratio up to 500/5, the peak value of this voltage is  $\dot{U} \leq 200$  V. For reasons of hazard protection and to prevent magnetisation of the iron core, an open secondary circuit is to be avoided.

**Busbar cross section**

The openings of our individual plug-in transformers for the acceptance of primary busbars or their cross sections – even when supplied with copper busbars – are not decisive for the dimensioning of the busbar units. The cross section of the busbar is permitted to be smaller over a short distance in the transformer area, provided the adjacent busbar cross sections are dimensioned in such a manner that any possible excess heat can easily be absorbed.

**Special configurations**

Saturation transformers	on request
Tropicalised versions	on request
Primary nominal currents deviating from the standard series	on request
Secondary change-over units	refer to the relevant types of CTs
Deviating frequency (16 2/3 Hz up to 400 Hz)	on request

Resin hardened for extreme mechanical demands (shakeproof) on request

**Current error** Is the percentage deviation of the nominal transmission multiplied by the secondary current from that of the primary current. The current error is calculated positively, should the actual value of the secondary current exceed the nominal value.

$F_I$  = current error in %

$I_S$  = secondary current in A (effective value)

$I_P$  = primary current in A (effective value)

$K_N$  = rated measuring ratio

$$F_I = \frac{I_S K_N - I_P}{I_P} \cdot 100\%$$

**Thermal nominal continuous rated current** [ $I_D$ ] Is the primary current which allows the continuous operation of the current transformer. When using this current value, the temperature of the secondary wiring must not exceed the prescribed values mentioned in the actual technical norms. These values are in direct relation to the isolation material class. Should a thermal rated current be defined which is larger than the primary rated current, the preference values of 120 %, 150 % and 200 % should reflect those of the primary rated current.

**Thermal rated short-time current** [ $I_{TH}$ ] This value indicates the effective value of the primary current which the current transformers can withstand with short-circuited secondary winding. Other rated measuring values as 1 s, e.g. 0.5 s, 2 s and 3 s are acceptable. The thermal short time rated current  $I_{th}$  has to be stated for each current transformer.

**Over-current rated limiting factor (FS)** Is the ratio of the limit rated current to the primary rated current.  
Note 1: It ought to be noted that the actual overload rated current is influenced by the burden.  
Note 2: Should the primary winding of the current transformer be short-circuited, the safety is greatest, when the value of the overload current limit factor "FS" is small. The excess current limiting factor is indicated on the rating plate of a measuring transformer with a nominal value after the letters "FS".

The specification "FS 5" signifies that the total measurement deviation of the current transformer with 5 times the primary nominal current arising from the magnetic saturation of the iron core amounts at least to 10 %.

**Important:** All DEIF current transformers are in accordance with IEC/EN 61869/1+2 for a thermal nominal current of  $I_D = 1.0 \times I_N$ .

## 1.2 Configuration of DEIF low voltage current transformers

All low voltage current transformers manufactured at DEIF correspond to DIN 42600 and IEC/EN 61869/1+2.


### Characteristics of the current transformers:

- Unbreakable plastic housings
- Black polycarbonate
- Flame-resistant
- Self-extinguishing
- Transformer housings are ultrasonically welded
- Nickel-plated secondary terminals with plus-minus nickel-plated screw M 5×10 mm

- Integrated secondary locking caps

Foot angle and busbar mounting screws with isolating protection caps (protection-proof) are supplied free of charge. All transformers are suitable for use on massive primary conductors as well as on flexible isolated copper strips.

Isolating protection cap

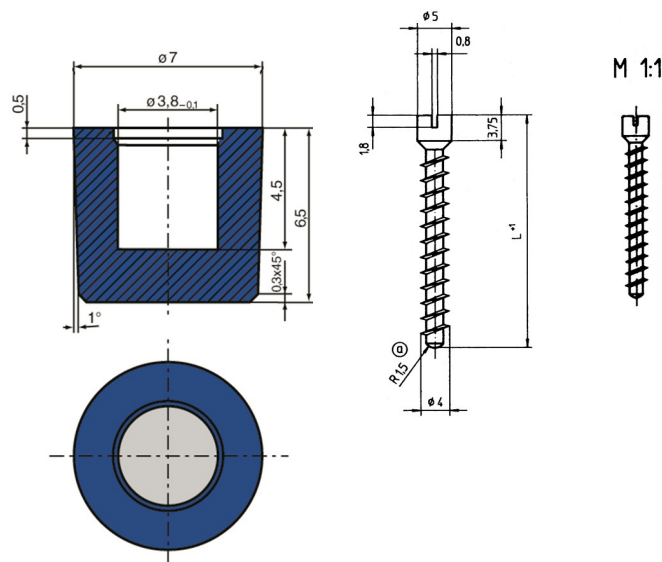

Busbar mounting screw, screw length (L)  
25, 32, 36, 46, 54, 80 mm, torque 0.5 Nm

**General technical specifications:**

Nominal frequency	50 Hz and 60 Hz (16 2/3 Hz up to 400 Hz on request)
Isolation class	E
Thermal nominal short-time current	$I_{th} = 60 \times I_N$ (ASK, ASR, KBU)
Thermal nominal short-time current	$I_{th} = 40 \times I_N$ (WSK, KSU, SUSK)
Maximum operating voltage	$U_m \leq 0.72$ kV
Over-current limiting factor	FS 5 to FS 15 (see label for precise rating)
Secondary nominal current	5 A or 1 A
Operating temperature	$-5^\circ\text{C} \leq \leq +50^\circ\text{C}$
Storage temperature	$-25^\circ\text{C} \leq \leq +70^\circ\text{C}$

<b>Error limit values for measuring transformers for classes 0.2 ... 3 according to IEC/EN 61869/1+2</b>										
Class accuracy	Current error $\pm \delta_F$ by					Phase displacement error $\pm \delta_F$ by				
	1.2 $I_N$ 1.0 $I_N$	0.2 $I_N$	0.1 $I_N$	0.05 $I_N$	0.01 $I_N$	1.2 $I_N$ 1.0 $I_N$	0.2 $I_N$	0.1 $I_N$	0.05 $I_N$	0.01 $I_N$
	%	%	%	%	%	min	min	min	min	min
0.2	0.2	0.35		0.75		10	15		30	
0.2 s	0.2	0.2		0.35	0.75	10	10		15	30
0.5	0.5	0.75		1.5		30	45		90	
0.5 s	0.5	0.5		0.75	1.5	30	30		45	90
1	1	1.5		3		60	90		180	
3	3					120.0*				

\* by 0.5  $I_N$  and thermal nominal continuous current.

<b>Error limit values for current transformers for protection applications</b>									
Class accuracy	Current error $\pm F_i$ by				Phase displacement error $\pm F_i$ by				
	1.0 $I_N$ and thermal nominal continuous current	0.5 $I_N$	0.2 $I_N$	0.05 $I_N$	1.0 $I_N$ and thermal nominal continuous current	0.5 $I_N$	0.2 $I_N$	0.05 $I_N$	
	%	%	%	%					
5 P ...	1		1.5	3	60		90	120	
10 P ...	3	3			120	120			

Current error  $F_g$  at nominal error current limit and nominal burden

class 5P ...  $\leq$  5 %  
class 10P ...  $\leq$  10 %

<b>Maximum permissible current of copper busbars Dimensions and current values according to DIN 43671</b>			
Busbar cross section	1 busbar	2 busbars	3 busbars
20 × 10	427 A	825 A	1180 A
30 × 05	379 A	672 A	896 A
30 × 10	573 A	1060 A	1480 A
40 × 05	482 A	836 A	1090 A
40 × 10	715 A	1290 A	1770 A
50 × 10	852 A	1510 A	2040 A
60 × 10	985 A	1720 A	2300 A
80 × 10	1240 A	2110 A	2790 A
100 × 10	1490 A	2480 A	3260 A
Busbar surface		Clear	


The values above are valid for continuous current burden at approx. 30 °C ambient temperature.

### 1.3 Markings of the current transformers connection terminals

The connections of all primary windings are marked with capital letters “K-P1”, and “L-P2” where the normal primary current flow is from K-P1 to L-P2. The connections of all secondary windings are marked with the corresponding lower case letters “k-s1” and “l-s2”. By current transformers with multiple secondary windings, the winding end is marked “l”, followed by the prefix letter “l1”, the windings with a decreasing number of windings are sequentially numbered “2”, “3”, etc.

By current transformers with a multiple of independent primary windings, the terminals of the individual windings are distinguishable from the additional capital letters set before “K” and “L” and the additional capital letters “A”, “B”, “C”, etc.; i.e. “AK” – “AL” for the highest primary circuit, “BK” – “BL” for the second primary circuit, etc.; or on each terminal pair the transmission or the ratio transmission of the individual primary windings to each other is to be specified.

### 1.4 Error curves of low voltage current transformers

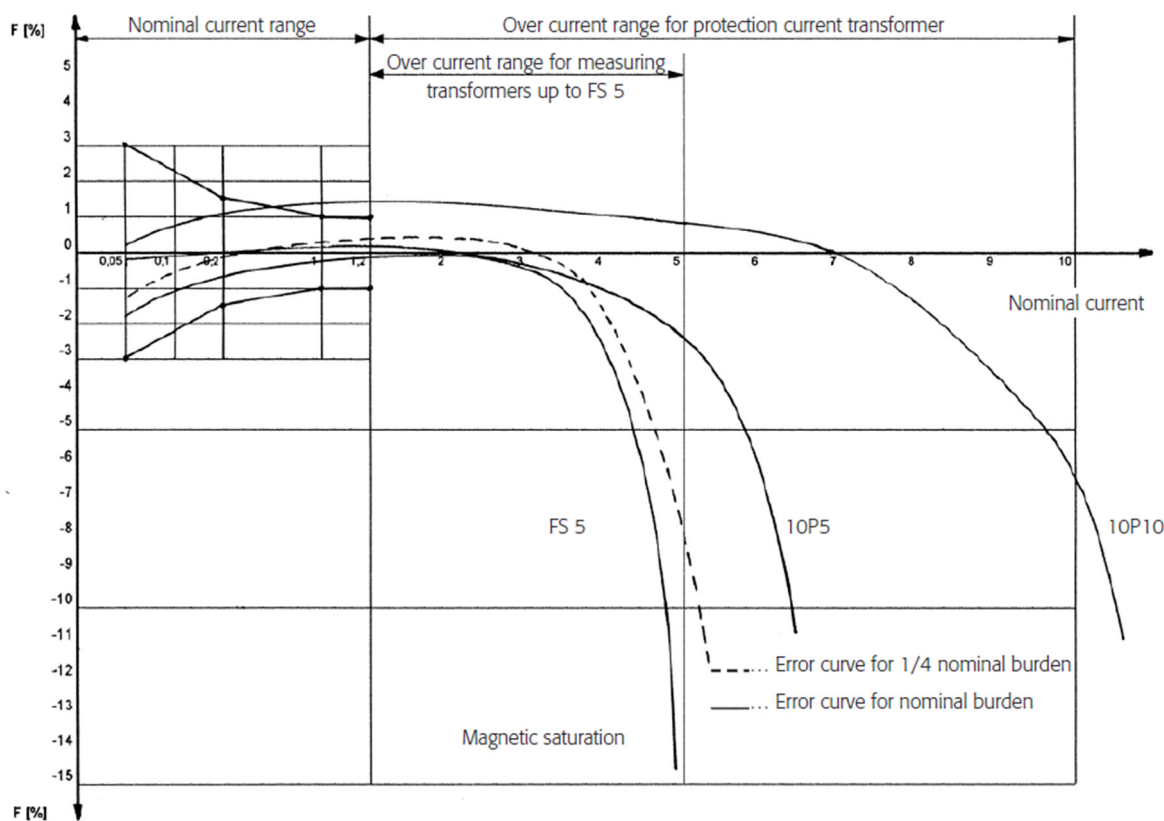



## 1.5 Power requirements of measuring units and relays

Two main requirements are cited by the user for the principle demands of current transformers:

- A high degree of measuring precision in the range of nominal current
- A protection function in the overload range

In order to fulfill these demands it is necessary for the assumed nominal power of a current transformer to fully achieve the actual power requirements of the prescribed measurements. In ascertaining the actual power requirements, consideration is to be given to power losses of the appliances to be connected, as well as to the losses of the measuring conductor.

Power requirements of typical measuring units				
Current meter soft ironed up to 100 mm Ø		0.700	–	1.500 VA
Rectifier current meter		0.001	–	0.250 VA
Multi-range current meter		0.005	–	5.000 VA
Current recorder		0.300	–	9.000 VA
Bimetal current meter		2.500	–	3.000 VA
Power meter		0.200	–	5.000 VA
Power recorder		3.000	–	12.000 VA
Power factor meter		2.000	–	6.000 VA
Power factor recorder		9.000	–	16.000 VA
Energy meter (current path)		0.400	–	1.000 VA
Relay	N relay			14.000 VA
	Over-current relay	0.200	–	6.000 VA
	Over-current time relay	3.000	–	6.000 VA
	Direction relay			10.000 VA
	Bimetal relay	7.000	–	11.000 VA
	Distance relay	1.000	–	30.000 VA
	Differential relay	0.200 1.000	–	2.000 VA 15.000 VA
Transformer current trip switch		5.000	–	150.000 VA
Controller		5.000	–	180.000 VA

### Power consumption of copper wires:

$$P = \frac{I^2 \times 2l}{q_{cu} \times 56} \text{ [VA]} \quad I = \text{secondary nominal current} \quad l = \text{distance in m} \quad q_{cu} = \text{wire cross section in mm}^2$$

Comment: With a joint three-phase current return conductor, the values of P are halved.

<b>Chart for values referring to 5 A</b>										
Nominal cross section	1 m	2 m	3 m	4 m	5 m	6 m	7 m	8 m	9 m	10 m
2.5 mm <sup>2</sup>	0.36	0.71	1.07	1.43	1.78	2.14	2.50	2.86	3.21	3.57
4.0 mm <sup>2</sup>	0.22	0.45	0.67	0.89	1.12	1.34	1.56	1.79	2.01	2.24
6.0 mm <sup>2</sup>	0.15	0.30	0.45	0.60	0.74	0.89	1.04	1.19	1.34	1.49
10.0 mm <sup>2</sup>	0.09	0.18	0.27	0.36	0.44	0.54	0.63	0.71	0.80	0.89

<b>Chart for values referring to 1 A</b>										
Nominal cross section	10 m	20 m	30 m	40 m	50 m	60 m	70 m	80 m	90 m	100 m
1.0 mm <sup>2</sup>	0.36	0.71	1.07	1.43	1.78	2.14	2.50	2.86	3.21	3.57
2.5 mm <sup>2</sup>	0.14	0.29	0.43	0.57	0.72	0.86	1.00	1.14	1.29	1.43
4.0 mm <sup>2</sup>	0.09	0.18	0.27	0.36	0.45	0.54	0.63	0.71	0.80	0.89
6.0 mm <sup>2</sup>	0.06	0.12	0.18	0.24	0.30	0.36	0.42	0.48	0.54	0.60
10.0 mm <sup>2</sup>	0.04	0.07	0.11	0.14	0.18	0.21	0.25	0.29	0.32	0.36