

Type:	2FQ96-x Double pointer frequency meters
-------	---

Technical specifications

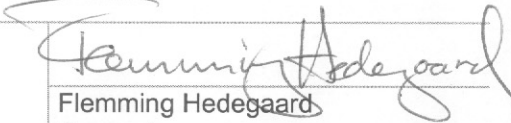
Accuracy	Class 0.5 (-10...15...30...55°C) IEC 51 and EN 60051
Scale/measuring range:	2 x 45...55Hz, 55...65Hz or 45...65Hz
Measuring voltage:	100-220V AC $\pm 15\%$ or 230-440V AC $\pm 15\%$
Consumption:	3...6mA per system
Housing, dimensions & outlines:	To DIN 43700 and DIN 43718

Type test specifications**Tested according to:**

Vibration:	2-13.2Hz: 3mm 13.2-100Hz: 1g	GL + LR: Test 1 DNV: Class A
Shock:	6 attempts with 15g (in 3 directions) 50g/6ms 22g/20ms	IEC 68-2-27 Test Ea
Climate:	Class HUE	DIN 40040
Protection:	Front: IP52 Terminals: IP00	IEC 529 and EN 60529
Ambient temperature:	-10...+ 55°C (nominal) -25...+ 60°C (operating) -25...+ 65°C (storage)	GL, DNV and LR EN 60051 and IEC51
Test voltage:	2kV – 50Hz – 1 min. Between the two measuring systems mutually and earth	IEC 1010-1 and EN 61010-1
EMC:	Immunity Emission	SS4361503 (PL4) IEC 255-4 (class 3) EN 50082-1/2 EN 50081-1/2

DEIF A/S
Frisenborgvej 33
DK-7800 Skive
Denmark

Date: 010813


Flemming Hedegaard
Supporter