



1.1.6 Connection - TAV-321DG

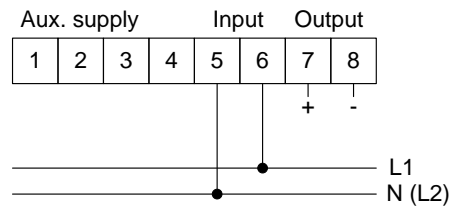

1.1.7 Mechanical drawing/dimensions in mm (inches)

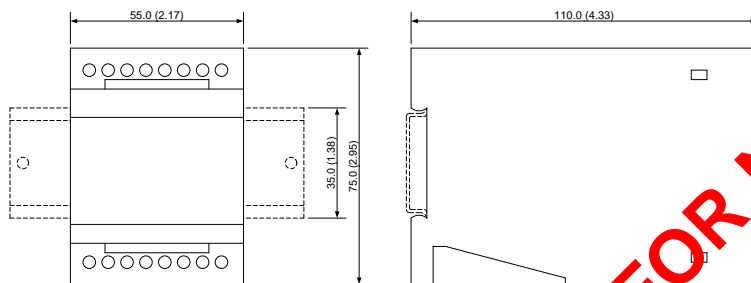

Weight:

TAV-311DG: approx. 0.4 kg

TAV-321DG: approx. 0.3 kg

1.1.8 Order specifications

To order a transducer with a standard input, only quote the type and order no.:

Type - order no.

Example:

TAV-311DG - 1207010022 (see the tables in section "Available transducers").

To order a TAV-311DG transducer with a customised input:

Type - Measuring voltage - Output - Supply

Example:

TAV-311DG - 0...450 V - 4...20 mA - 48...110 V_{dc}

To order a TAV-321DG transducer with a customised input:

Type - Measuring current - Output

Example:

TAV-321DG - 0...220 V - 0...10 V

Please note that some combinations of input, output and aux. supply are not available as standard.

1.1.9 Disclaimer

DEIF A/S reserves the right to change any of the contents of this document without prior notice.