

**DEIF A/S****Type certificate**

4124010044A

Type:	VDQ96-sw Ammeter with built-in switch
-------	---------------------------------------

Technical specifications


Scale:	Exchangeable. Measuring range according to the used current transformer.
Measuring range	0...1A, 0...5A or from current transformer(s)
Burden	-/1A: approx. 0.1VA -/5A: approx. 0.15VA
Frequency	45...65Hz
Accuracy	Class 1.5 (-10...15...30...55°) IEC and EN 60051

Type test specifications**Tested according to:**

Vibration:	3-13.2Hz 3mm 13.2-100Hz 1.0g	Class A, DNV Test 1, GL and LR
Shock:	6 attempts with 15g (in 3 directions) 50g/6ms 22g/20ms	IEC68-2-27, Test: EA
Climate	Class HUE	DIN 40040
Protection	Standard IP52	IEC 529 and EN 60529
Temperature:	Option -10...55°C (nominal) -25...60°C (operating) -40...65°C (storage)	EN 60051 and IEC 51
Safety:	600V CAT. III pollution deg. 2	EN 61010-1
EMC:	Immunity Emission	EN 50082-1/2 EN 50081-1/2 CE marked for residential, commercial and light industry plus industrial environment

DEIF A/S
Frisenborgvej 33
DK-7800 Skive
Denmark

Date: 020805

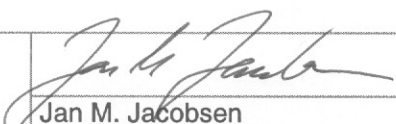

Jan M. Jacobsen
Senior Product Specialist